

Disk Station DS109+

Speedy 1-bay SATA NAS Server for Small-and-Medium Business Users



Key Features

- High Speed
 - 50+ MB/Sec Windows Write
 - 51+ MB/Sec Windows Read
- Windows + Mac + Linux
- Power Saving (12W~21W)

Shipped with Disk Station Manager 2.1 that provides:

- AJAX-Based Management Interface
- Windows ADS Support
- Encrypted Network Backup
- Encrypted FTP with Hack Prevention
- Business Mail Server
- Corporate Surveillance
- Schedule Power On/Off

And more...

Synology Disk Station DS109+ offers PC server equivalent performance for efficient data sharing and backup. Its high performance coupled with sophisticated Synology Disk Station Manager 2.1 provides an ideal solution for cross platform sharing, secure server backup, Windows ADS integration, business mail server, and corporate surveillance.

Management & Backup

When User Home is enabled, Synology Disk Station DS109+ automatically creates a home folder for every user account to provide each user with a private space to store data. This eliminates the need for the administrator to repeatedly create shared folders and user accounts.

Synology Network Backup allows users to back up files from one to another Synology Disk Station or any rsync-compatible server, The Local Backup allows backups to external hard drives via USB or eSATA, both providing flexible scheduling options.

Secure File Sharing

Synology File Station 2 simplifies file management with a web browser by introducing Windows-style user's interface and advanced features including drag-n-drop, sub-folder privilege settings, multiple files upload and download, and remote unzip features.

HTTPS provides a secure way for Internet access. When it's enabled, connections to the web-based Web Station, Photo Station 3, File Station 2, Surveillance Station 2, and Audio Station are all secured with SSL/TLS.

FTP service over SSL/TLS encryption ensures file sharing at a high security level. Unicode, write-only and sophisticated bandwidth management are also supported.

Office Applications

Synology Mail Station add-on provides a one step installation and enables Synology Disk Station DS109+ to be a mail server that supports Outlook-like Web mail, SMTP, POP3, and IMAP.


Synology Surveillance Station 2 enables Synology Disk Station DS109+ to be an economical network video recording (NVR) solution. Over 130 popular IP cameras of varying brand names are supported.

Eco Friendly

Synology Disk Station is designed and developed perpetually with the concept of energy saving. Compared with its average PC counterparts, Synology Disk Station DS109+ consumes a relatively low amount of power and hibernates when not in use. This not only helps to save energy but also extends the lifespan of the hard disk.

Additionally, all Synology products are produced with RoHS compliant parts and packed with recyclable packing materials. Synology recognizes its responsibility as a global citizen and is continually working to reduce the environmental impact of the products we create.

CONNECTIONS & BUTTONS

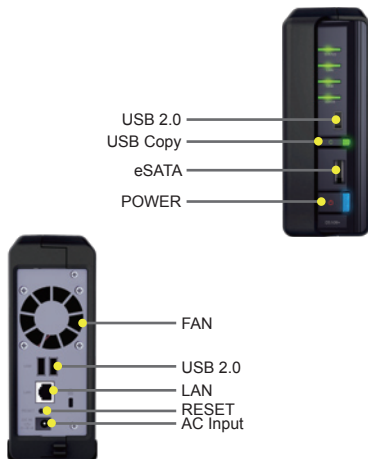

Technical Specifications

Hardware

- CPU: 1.06GHz, 64bit@DDR533, with floating point
- RAM Size: 512 MB
- Internal HDD⁽¹⁾: 1X 3.5" SATA(II) or 1X 2.5" SATA/SSD using Synology 2.5" Disk Holder Type A
- External HDD Interface: 3X USB 2.0 ports, 1X eSATA port
- Size: 160mm X 218mm X 63mm
- Weight: 0.81kg
- LAN: 1X Gigabit
- Fan: 1X (50mmX50mm)
- Noise Level⁽²⁾: 25 dB(A)
- Power Recovery
- AC Input Power Voltage: 100V to 240V
- Power Frequency: 50Hz to 60Hz, Single Phase
- Max HDD Support (Internal HDD): 2TB
- Max Supported IP Camera #: 10⁽⁷⁾
- Operating Temperature: 5°C to 35°C (40°F to 95°F)
- Storage Temperature: -10°C to 70°C (15°F to 155°F)
- Relative Humidity: 5% to 95%RH
- Maximum Operating Altitude: 10,000 feet

Power Consumption⁽³⁾

- 21 W (Access); 12 W (Hibernation)

Certification

- FCC Class B, CE Class B, BSMI Class B

Networking Protocols

- CIFS
- AFP (3.1)
- FTP
- NFS
- Telnet/SSH

Security

- FTP over SSL/TLS (explicit)
- FTP Auto-Block
- Encrypted Network Backup
- Encrypted rsync
- HTTPS Connection

File System

- EXT3
- FAT (External Disk Only)
- NTFS (External Disk Read Only)

File Sharing

- Max User Accounts: 2,048
- Max Groups: 256
- Max Shared Folder: 256
- Max Concurrent Connections (SAMB, FTP, AFP): 256

Utilities

- Synology Assistant
- Synology Data Replicator 3
- Synology Download Redirector
- Add Printer Wizard

Applications

- Surveillance Station 2
- Photo Station 3
- File Station 2
- Audio Station
- Web Station
- PHP/MySQL
- Download Station 2
- iTunes Server

Packages

- Mail Station
- SqueezeCenter
- Webalizer

UPnP Multimedia Service Support

- Sony PS3, Microsoft Xbox360
- Audio Format: AAC, FLAC, M4A, MP3, Ogg Vorbis, WAV, WMA, WMA VBR, WMA PRO, WMA Lossless
- Video Format: ASF, AVI, DAT, DivX, MP4, MPEG1, MPEG2, MPEG4, VOB, WMV, XviD
- Image Format: BMP, JPG (jpe, jpeg), GIF, ICO, PNG, PSD, TIF (tiff), UFO
- Playlist Format: WPL, M3U
- Subtitle: srt, psb, smi, ass, ssa, sub, idx, ifo

iTunes Server Support

- Audio Format: MP3, M4A, M4P, WAV⁽⁴⁾, AIF⁽⁴⁾
- Playlist Format: M3U, WPL

Audio Station Support

- USB Mode: (Audio) AAC, FLAC, M4A, MP3, Ogg Vorbis, WMA, WMA VBR (Playlist) M3U, WPL (Internet Radio) SHOUTcast, Radioio
- Streaming Mode: (Audio) MP3 (Playlist) M3U, WPL

Photo Station 3 Support

- Video Format: ASF, AVI, MPEG1, MPEG4, WMV, XviD, DivX, FLV, DAT⁽⁵⁾, MP4⁽⁵⁾, MPEG2⁽⁵⁾, RM⁽⁵⁾, RMVB⁽⁵⁾, VOB⁽⁵⁾
- Image Format: BMP, JPG (jpe, jpeg), GIF

Management

- AJAX-based Management UI
- BitTorrent Port Range Setup
- BitTorrent DHT Support
- CIFS Recycle Bin
- Download Station Bandwidth control
- Download Station Port Range Setup
- Editable HTTP Error Page
- Email Alert Message
- Email Notification for New User
- Package Management
- External HDD Hibernation

- Scheduled Power On/Off
- Firmware Upgrade
- FTP passive port range
- Hide-able Shared Folder
- Internal HDD Hibernation
- Removable Default Shared Folder
- Ez-Internet
- PPPoE
- UPS Management (Over USB 2.0)
- User Quota
- Web-based Download Station

Backup Solutions

- Network Backup
- Local Backup
- Desktop Backup (using Synology Data Replicator 3)
- 3rd-Party Backup Support

Supported Clients

- Windows 2000 onward
- Mac OS X 10.3 onward
- Linux

Printer Support⁽⁶⁾

- Max Printer #: 2
- Supported Protocols: LPR, CIFS, AppleTalk

Languages

- English, Danish, Dutch, Norwegian, Swedish, German, French, Italian, Polish, Russian, Spanish, Korean, Traditional Chinese, Simplified Chinese, Hungarian, Turkish, Portuguese Brazil, Portuguese European

Environment

- RoHS Compliant

Package Content

- DS109+ Main Unit
- Installation CD
- Welcome Note
- Assembling Kit
- AC Power Adapter
- AC Power Cord
- 2M RJ-45 LAN Cable

(1) Hard drive not included.

(2) Fan only. Measured at 2300-6200RPM, varied among models. More details about dB(A) value, check <http://www.quietnoise.com/facts.htm>

(3) Measured with 1 Seagate 750GB ST3750640NS hard drive. The figures could vary on different environments.

(4) The music can be streamed, but the metadata (ex: title, album) may not be indexed on the iTunes.

(5) User can click and download the file, but not play it in Photo Station 3 as compressed Flash video.

(6) For Mac users, DS109+ supports PostScript USB printers only.

(7) 1 free license to install 1 IP camera. Additional licenses can be purchased to expand the license quota.

Networking



SYNOLOGY INC.

Founded in 2000, Synology is a young and energetic company dedicated to developing high-performance, reliable, versatile, and environmentally-friendly Network Attached Storage (NAS) products. Our goal is to deliver user-friendly solutions and solid customer service to satisfy the needs of businesses, home offices, individual users and families.

Copyright © 2009, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice. Printed in Taiwan, DS109+-2009-ENU-REV003

<http://www.synology.com>

3F-3, No. 106, Chang An W. Rd., Taipei, Taiwan
Tel: 886 2 2552 1814 Fax: 886 2 2552 1824